


**pietra di  
materà**



# pietra di matera



Met zijn gevarieerde keuze in grootte, dikte en oppervlak biedt Pietra di Matera de mogelijkheid om woonruimtes te creëren met een echt persoonlijke touch.

Avec son choix varié en taille, épaisseur et en surface, Pietra di Matera offre la possibilité de créer des espaces de vie avec une touche vraiment personnelle.


With its diverse choice in size, thickness, and surface, Pietra di Matera offers the opportunity to create living spaces with a truly personal touch.

Pietra di Matera bietet mit seiner vielfältigen Auswahl in Größe, Dicke und Oberfläche die Möglichkeit, Wohnräume mit einer ganz persönlichen Note zu schaffen.

Con la sua ampia scelta di dimensioni, spessori e superfici, Pietra di Matera offre l'opportunità di creare spazi abitativi dal tocco davvero personale.

「**pietra di  
matera**」

「avorio」

45.3x90.6 cm - 18"x36" inches  
60.4x60.4 cm - 24"x24" inches  
60.4x60.4x2 cm  - 24"x24"x0.8" inches



pietra di matera avorio

45.3x90.6 cm - 18"x36" inches  
45.3x90.6 cm - 18"x36" inches | riga



pietra di matera avorio

60.4x60.4 cm - 24"x24" inches  
45.3x90.6 cm - 18"x36" inches

「**pietra di  
matera**」

「**grigio**」

45.3x90.6 cm	- 18"x36" inches
60.4x60.4 cm	- 24"x24" inches
60.4x60.4x2 cm	- 24"x24"x0.8" inches
60.4x90.6x2 cm	- 24"x36"x0.8" inches






pietra di matera grigio

45.3x90.6 cm - 18"x36" inches

45.3x90.6 cm - 18"x36" inches | riga

60.4x63.4 cm - 24"x24" inches

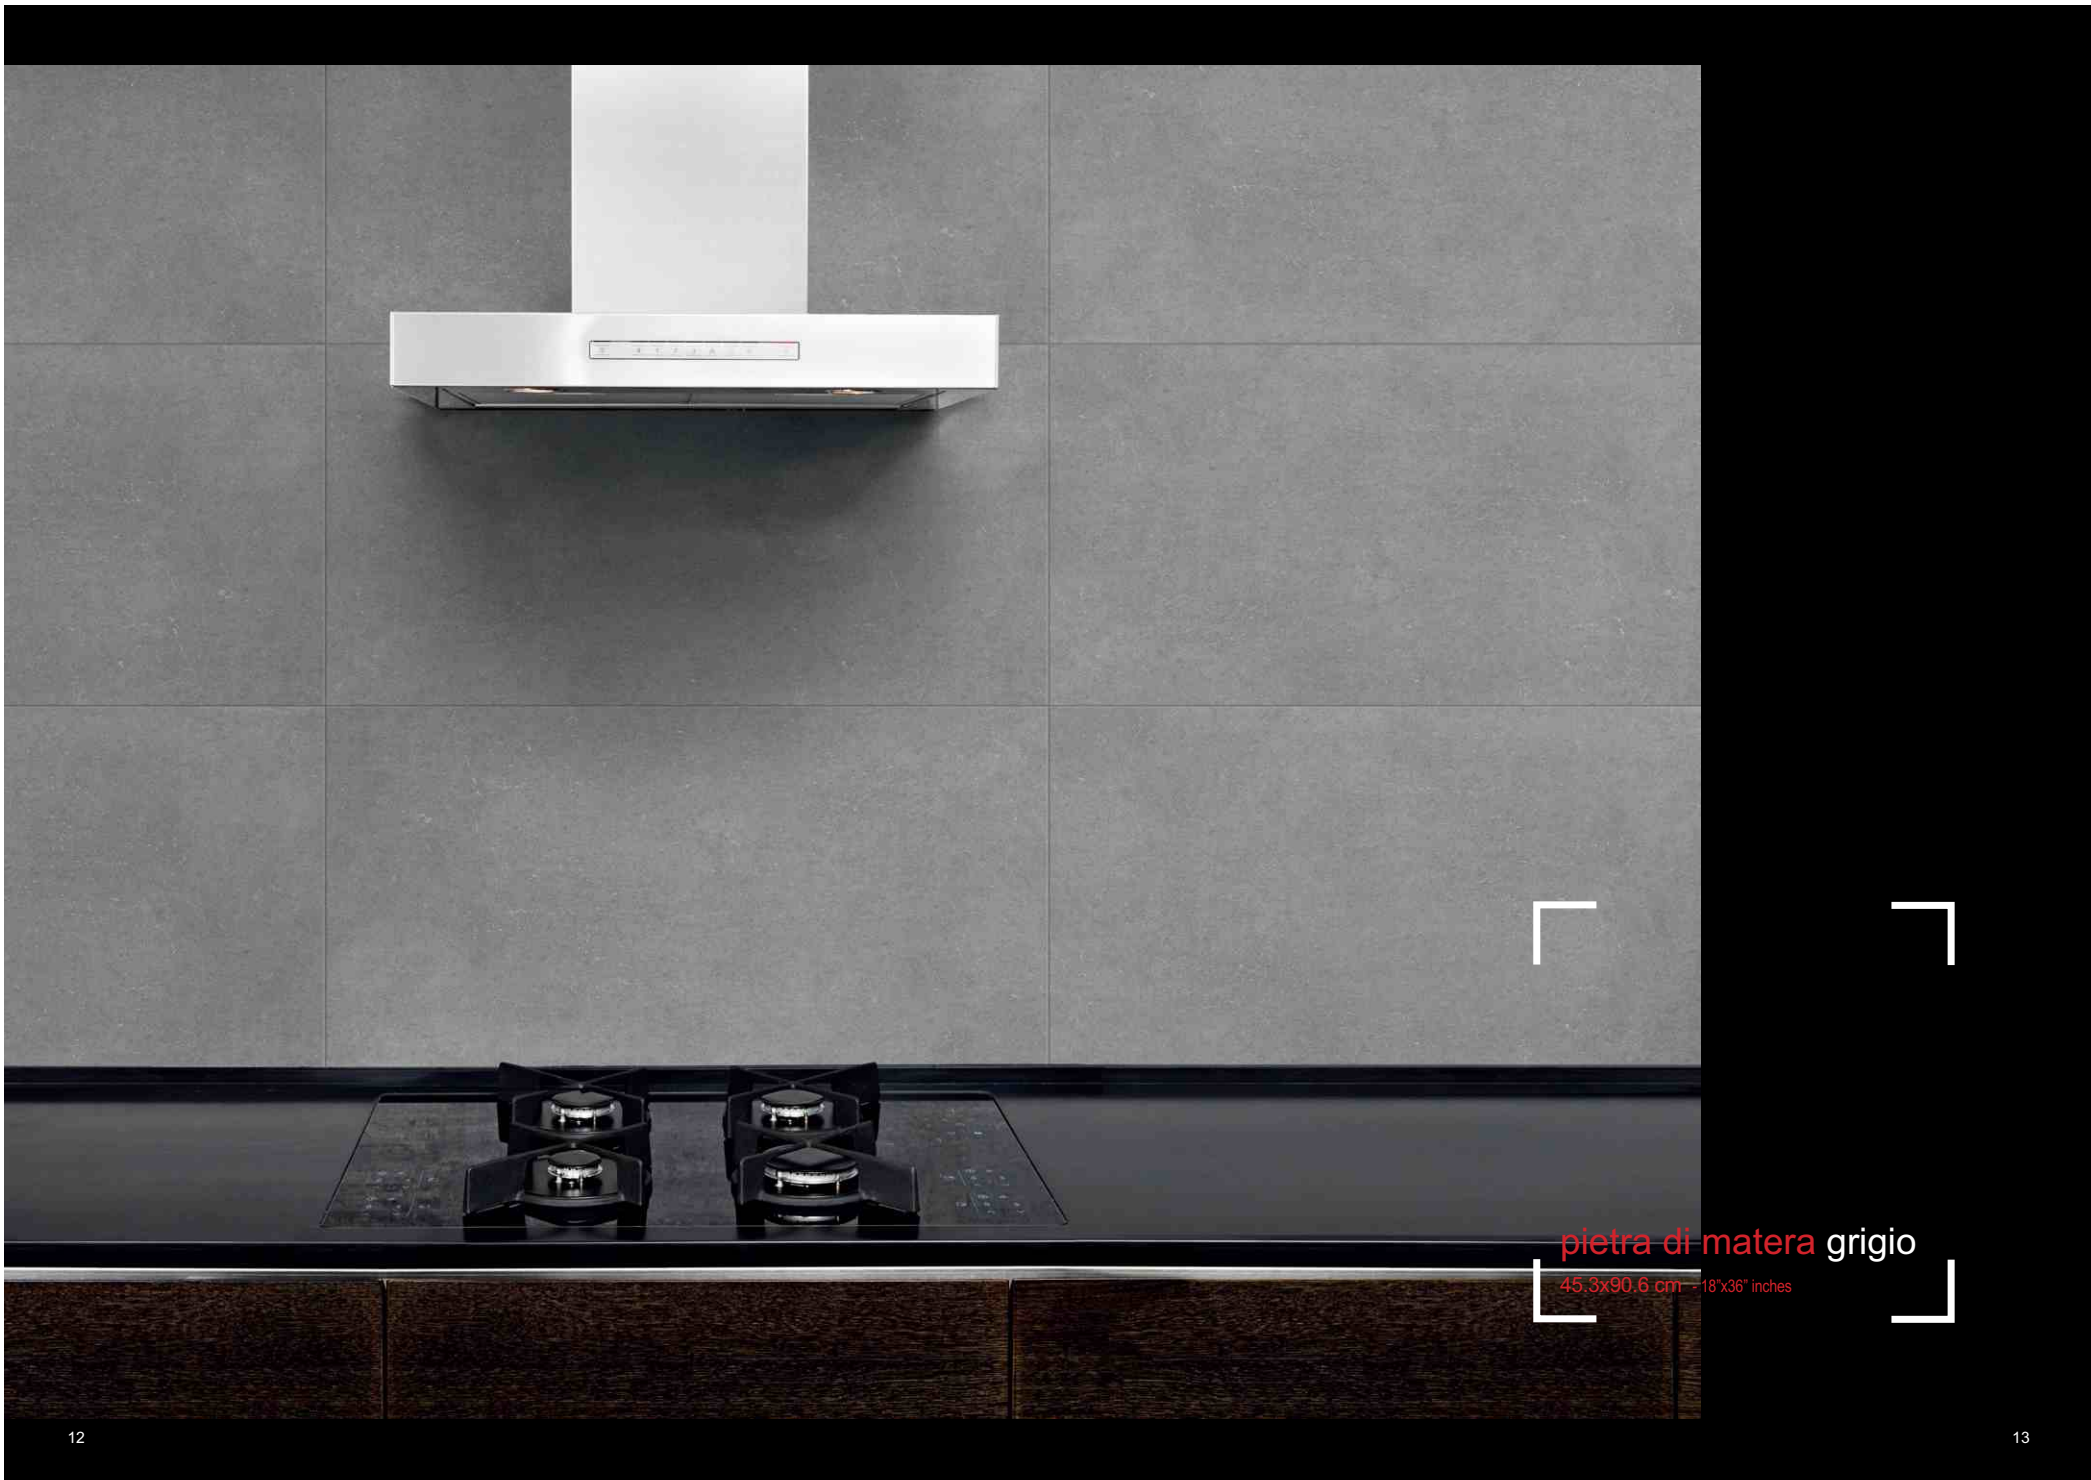

pietra di matera grigio

45,3x90,6 cm - 18"x36" inches



「 pietra di  
matera 」

「 blu 」

45.3x90.6 cm	- 18"x36" inches
60.4x60.4 cm	- 24"x24" inches
60.4x60.4x2 cm	- 24"x24"x0.8" inches
60.4x90.6x2 cm	- 24"x36"x0.8" inches




pietra di matera blu

45.3x90.6 cm - 18"x36" inches | riga  
60.4x60.4 cm - 24"x24" inches






pietra di matera 2cm ✂  
60.4x60.4x2 cm - 24"x24"x0.8" inches | avorio

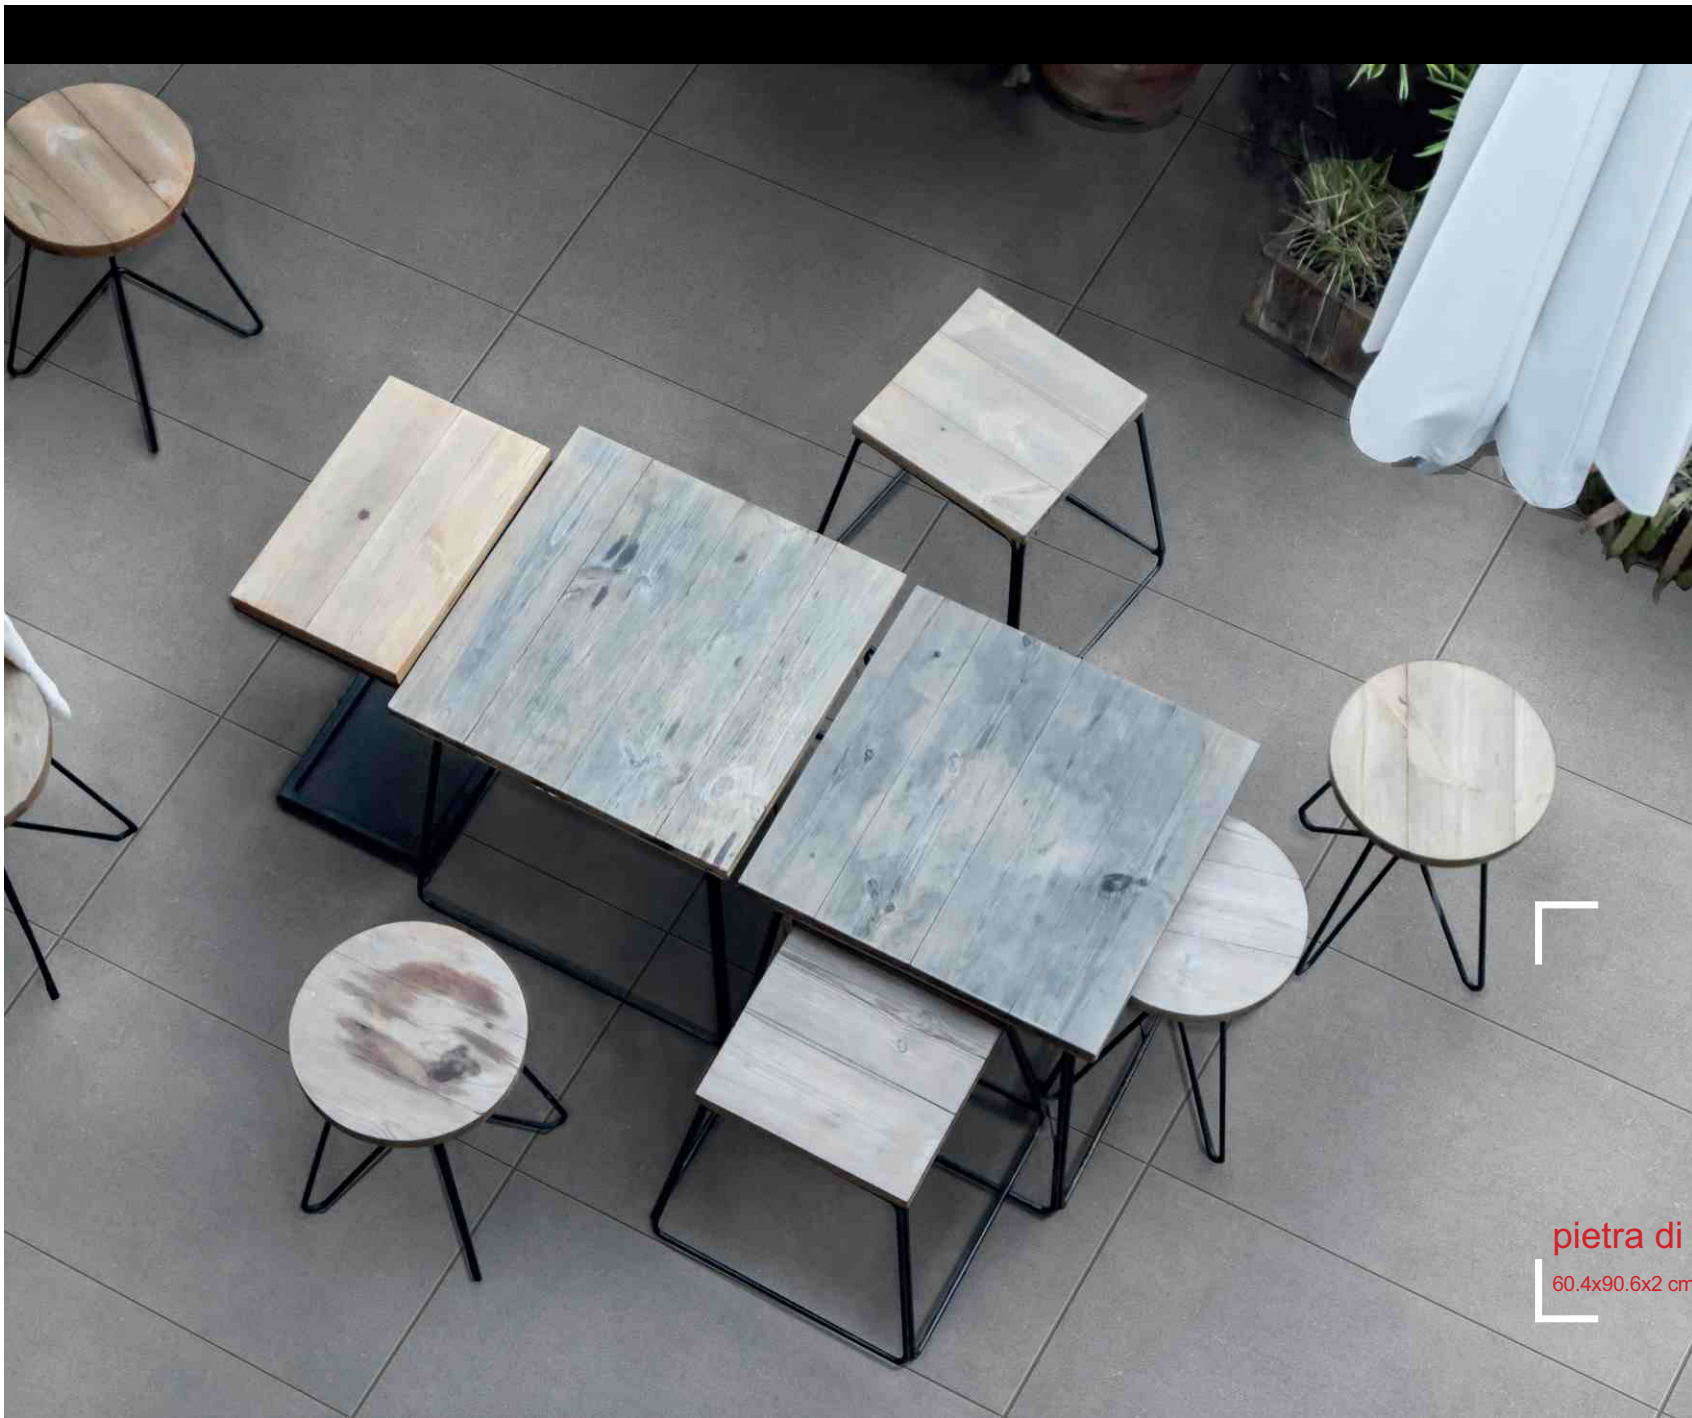

pietra di matera 2cm ✂  
60.4x90.6x2 cm - 24"x36"x0.8" inches | grigio



pietra di materia 2cm ✕  
60.4x90.6x2 cm - 24"x36"x0.8" inches | blu

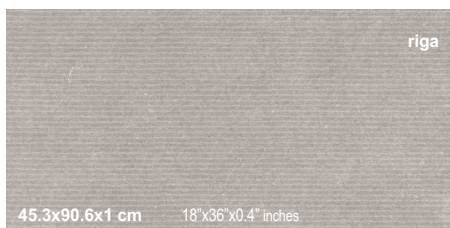

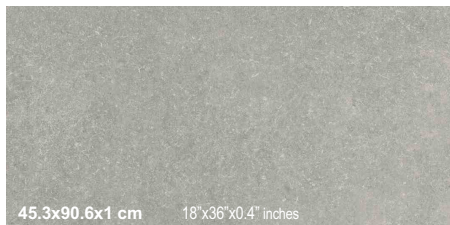


**V2**  
 Licht genuanceerde kleurschakering  
 Ton légèrement nuancé  
 Slightly different tone  
 Leicht unregelmäßig im Farbton  
 Leggermente mosso nel tono



2cm R 11 UGL





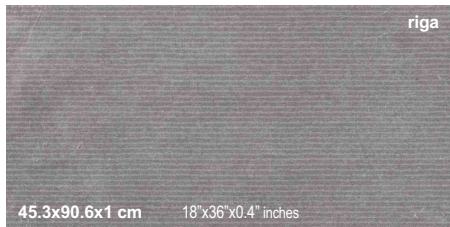

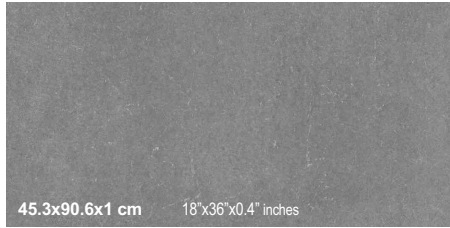


**V2**  
 Licht genuaneerde kleurschakering  
 Ton légèrement nuancé  
 Slightly different tone  
 Leicht unregelmäßig im Farbton  
 Leggermente mosso nel tono



2cm R 11 UGL


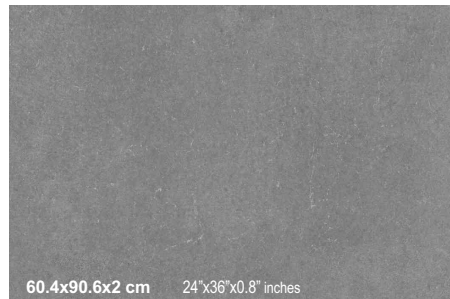



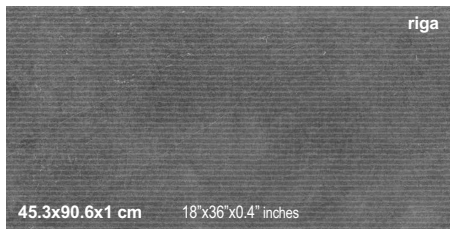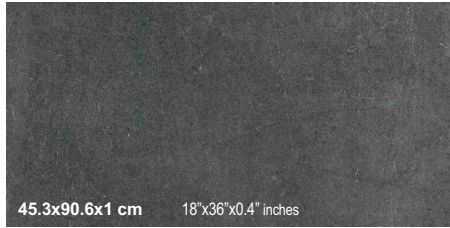

**V2**  
 Licht genuanceerde kleurschakering  
 Ton légèrement nuancé  
 Slightly different tone  
 Leicht unregelmäßig im Farbton  
 Leggermente mosso nel tono



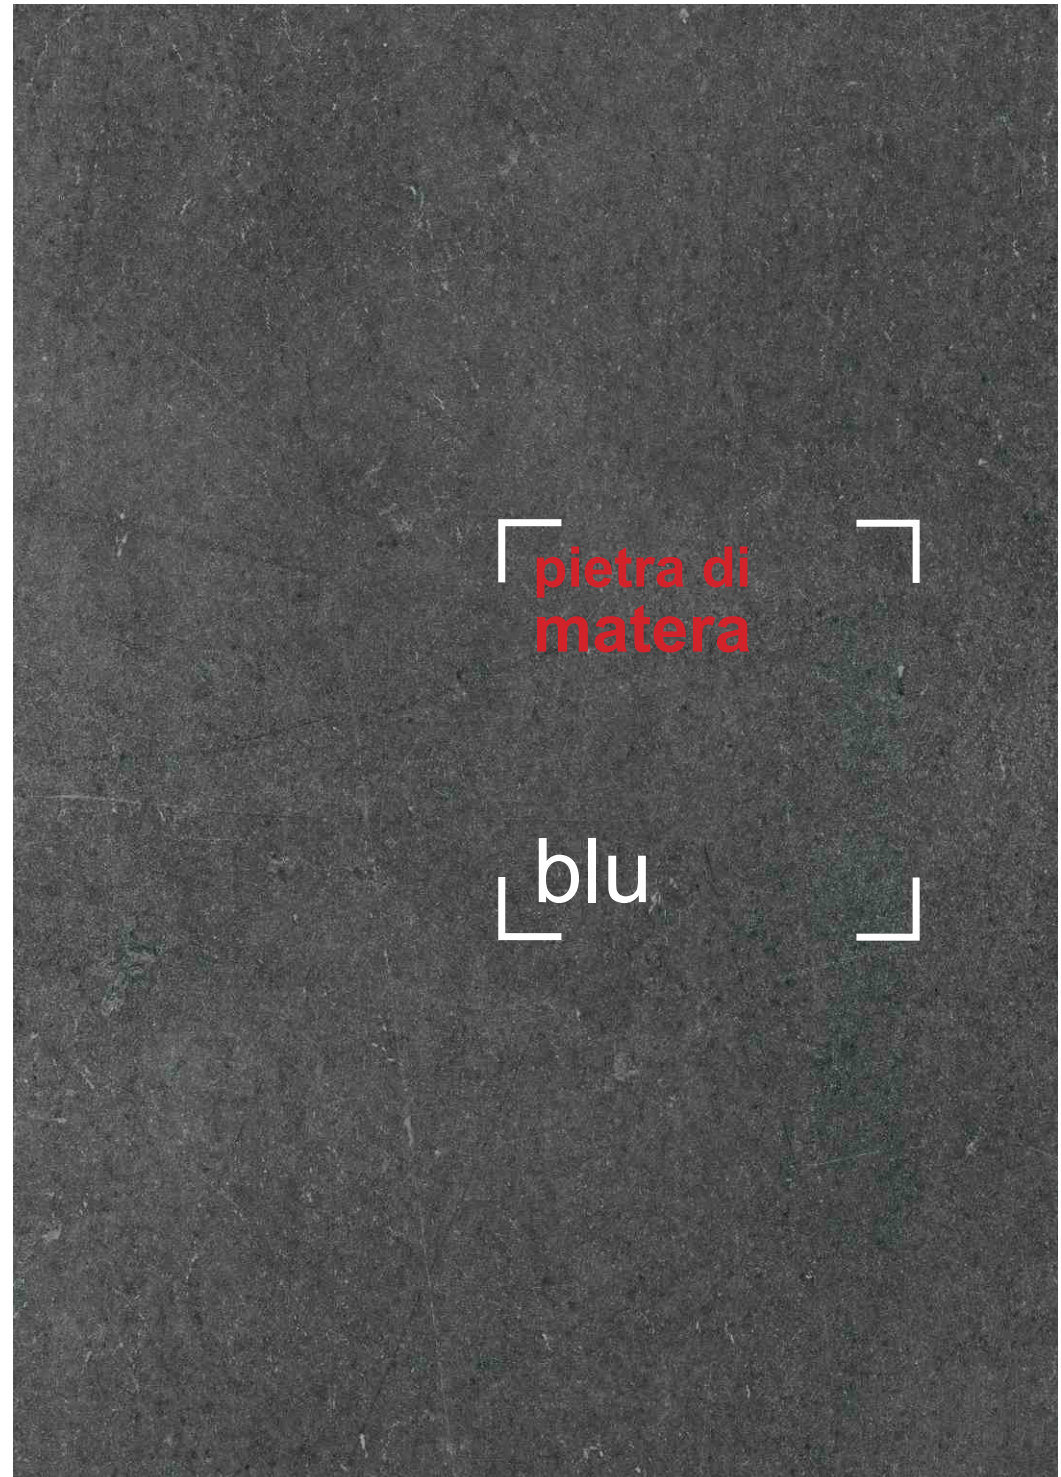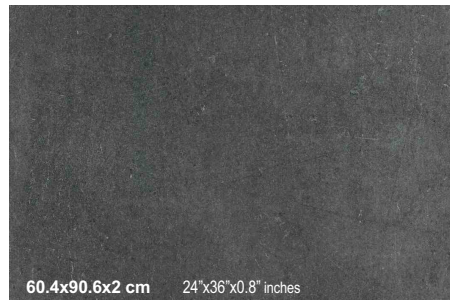

2cm R 11 UGL

















# pietra di matera

	avorio	grigio	blu	pcs/box	m <sup>2</sup> /box	m <sup>2</sup> /pallet	kg/m <sup>2</sup>
 <b>45.3x90.6x1 cm</b> 18"x36"x0.3" inches rect. R10	TS CFM490	TS CFM491	TS CFM492	3	1,23	39,36	22,4
 <b>45.3x90.6x1 cm</b> 18"x36"x0.3" inches rect. R11 riga	TS CFM490RI	TS CFM491RI	TS CFM492RI	3	1,23	39,36	22,4
 <b>60.4x60.4x1 cm</b> 24"x24"x0.3" inches rect. R10	TS CFM600	TS CFM601	TS CFM602	4	1,46	43,8	22,4
 <b>60.4x60.4x2 cm</b> 24"x24"x0.8" inches. rect. R11	TS CFM60X	TS CFM61X	TS CFM62X	2	0,73	23,36	45
 <b>60.4x90.6x2 cm</b> 24"x36"x0.8" inches rect. R11		TS CFM691X	TS CFM692X	1	0,547	26,256	45
Plinten   Plinthes   Skirtings   Sockel   Battiscopa							
 <b>8x60.4 cm</b> 3"x24" inches. rect.	TS CFM600P	TS CFM601P	TS CFM602P	18			
 <b>8x90.6 cm</b> 3"x24" inches. rect.	TS CFM490P	TS CFM491P	TS CFM492P	15			

 	Reference Standard: EN 14411 : 2012 Ceramic Floor and Wall Tiles: Definitions, Classification, Characteristics and Marking
	Product Type: Dry Pressed : G Groupe Bla G
	Touchstones: PIETRA DI MATERA
	Use: Internal and External Wall and Floor Tiles

TEST METHODS		STANDARD AND TEST VALUE	DECLARED VALUE	
	Length and Width	ISO 10545-2	±0.6% /±2.0 mm	Compliant
	Deviation of mean thickness from manufacturing thickness		±5%/±0.5 mm	Compliant
 Straightness of the edges	±0.5%/±1.5 mm		Compliant	
 Orthogonality	±0.5%/±2.0 mm		Compliant	
 Surface Flatness	±0.5%/±2.0 mm		Compliant	
 Surface quality (% defect free)		95%		
 Water Absorption	ISO 10545-3	≤ 0.5 %	< 0,1 % (Average values of our last production)	
 Breaking strength (N) Thickness	ISO 10545-4	35 /mm2 min.	> 45 N/mm2 (Average values of our last production)	
		Bending strength (N/mm <sup>2</sup> )	Thickness ≥ 7,5 mm: 1300 N min.	Compliant
 Resistance to deep abrasion (removed Volume/mm <sup>3</sup> )	ISO 10545-7	specify PEI test and the number of exceeded cycles	Class 4	
 Resistance to thrill	SO 10545-11	Required	Resistant	
 Resistance to frost	ISO 10545-12	Required	Resistant	
 Chemical resistance (acid and alkali low concentrations)	ISO 10545-13	According to the classification provided by the manufacturer	GLA	
	ISO 10545-13	Min GB	Compliant	
 Stain resistance	ISO 10545-14	Class 3 min	Class 5	





info@touchstones.eu  
www.touchstones.eu